

Instrumentation Products

Ball Valves



Introduction

Introduction


The AS-Schneider Group with its headquarters in Germany is one of the World's Leading Manufacturers of Instrumentation Valves and Manifolds. AS-Schneider offers a large variety of Ball Valves and the relevant Accessories required for instrumentation installations globally.

Selection can be made from a comprehensive range of bodies with a variety of connections and material options, optimizing installation and access opportunities. Many of the valves shown in this catalogue are available from stock or within a short period of time. The dimensions shown in this catalogue apply to standard types. If you need the dimensions for your individual type please contact the factory.


Continuous product development may from time to time necessitate changes in the details contained in this catalogue. AS-Schneider reserves the right to make such changes at their discretion and without prior notice.

All dimensions shown in this catalogue are approximate and subject to change.


Extended Ball Valves for Flush Ring Installations

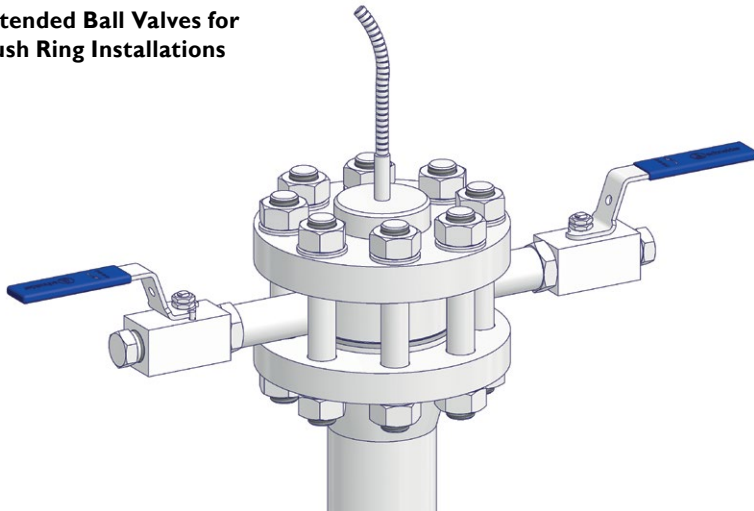

Low Pressure Ball Valves for Air Header Installations

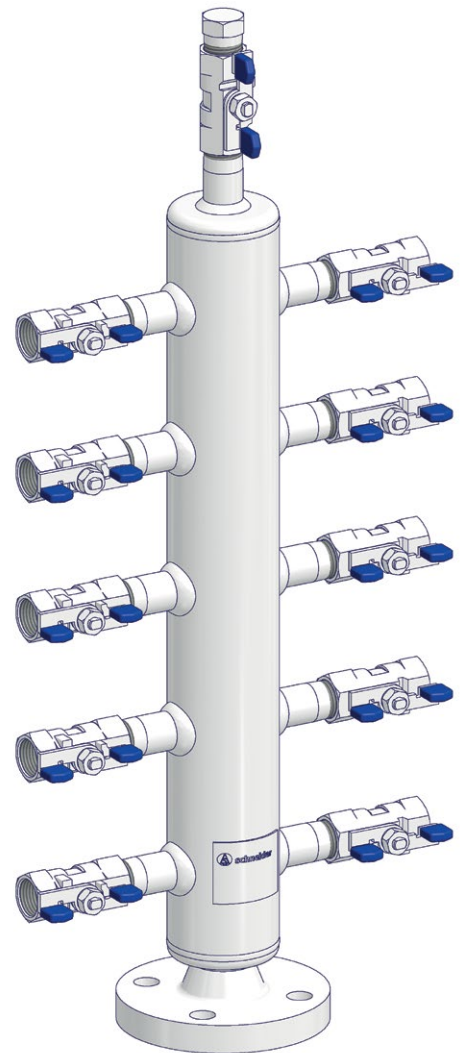

Close Coupled Multiport Ball Valve

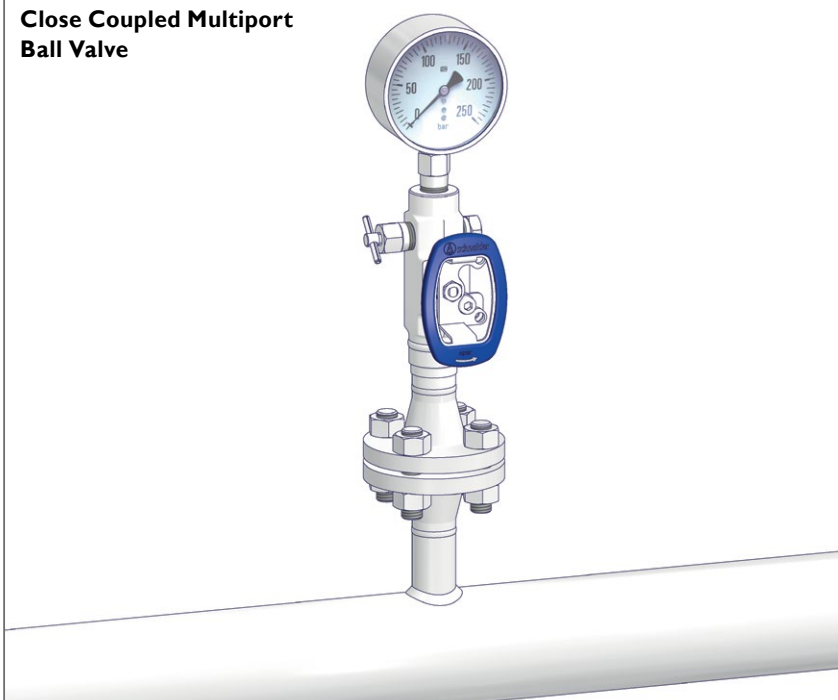

Introduction | page 2

Contents | page 3

KA Series

General Features | page 4

Standard Ball Valve Design | page 5

Options and Dimensions | page 6-7

K Series

General Features | page 8

Standard Ball Valve Design | page 9

KM Series I Metal Seated Ball Valves | page 10

Low Pressure Ball Valves 1,000 psi (69 bar) | page 11

KA Series Ball Valves | General Features

Body Material Options

Material Group	AS Material Designation	Material No.	Short Name	Equivalent UNS-No.	Material Grade acc. to ASTM	Ball Valves
Carbon Steel	LF2				LF2	Optional
Austenitic Stainless Steel	316 quadruple certified*	1.4401	X5CrNiMo17-12-2	S 31600	316	Standard
		1.4404	X2CrNiMo17-12-2	S 31603	316L	Standard
	6Mo	1.4547	X 1CrNiMoCuN20-18-7	S 31254		Optional
Austenitic-Ferritic Stainless Steel	Duplex	1.4462	X2CrNiMoN22-5-3	S 31803	F51	Standard
	Superduplex	1.4410	X2CrNiMoN25.7.4	S 32750	F53	Optional
Nickel Based Alloys	Alloy 400	2.4360	NiCu30Fe	N 04400		Standard
	Alloy C-276	2.4819	NiMo 16 Cr 15 W	N 10276		Standard
	Alloy 625	2.4856	NiCr22Mo9Nb	N 06625		Optional

* Quadruple Certified means 316 / 316L / 1.4401 / 1.4404

Standard Features

- Bore Size 10 mm (0.39")
- Max. Working Pressure 420 bar (6,092 psi) with PTFE Seats
- 2 Piece Body Design
- Floating Ball Design
- Bi-Directional (except 10,000 psi Option)
- Anti-blowout Stems
- Low Operating Torque

Stem Seal:

PTFE and Graphite Stem Sealings are available for all valve types.

Ball Seat:

Reinforced PTFE and PEEK.

Sour Gas Service:

Wetted parts according to a.m. material list are supplied as standard according to NACEMR0175/MR0103 and ISO 15156 (latest issue).

Pressure Test:

A shell test at 1.5 times the maximum working pressure and a seat leakage test are performed acc. to EN 12266-1 – P10, P11 and P12 respectively MSS-SP61 (and complies also with ASME B31.1 and B31.3) at every standard AS-Schneider Ball Valve → 100% Pressure Tested!

Certification:

Certified Mill Test Report (CMRT) as inspection certificate 3.1 acc. to EN 10 204 for valve body material and pressure test available on request.

Optional Features

- Max. Working Pressure 689 bar (10,000 psi) with PEEK Seats
- Anti-Static Design
- Extended Body
- Lockable Handle
- Oval Handle
- Pressure Tested according to API 598

Low-Temperature Service:

On request.

Oxygen Service:

On request.

If you don't find your options in this catalogue, please contact the factory.


KA Series I Standard Ball Valve Design

Standard Ball Valve Design



Screwed Design – Stem Seal: Packing

Features

- Floating Ball Design
- Ball Valve Seat:
 - Carbon filled PTFE or
 - PEEK
- Ball Seats are totally enclosed in end connector / body
- Stem Seal: Standard Packing in PTFE and Graphite
- Max. Working Pressure 420 bar (6,092 psi) with PTFE and PEEK Seats → Bi-Directional
- Max. Working Pressure 689 bar (10,000 psi) with PEEK Seats only → Uni-Directional
- Anti-blowout Stem Design
- Seat Leakage Class VI acc. to ANSI/FCI 70-2
- Positive Stop Pins
- All Non-wetted Parts in 316 Stainless Steel

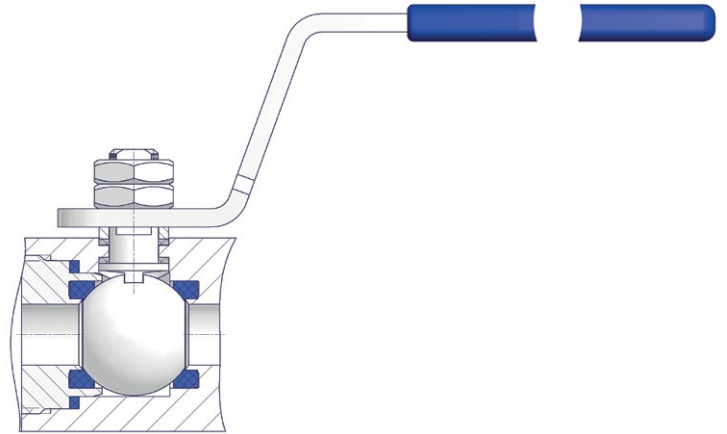

Pressure-Temperature Ratings

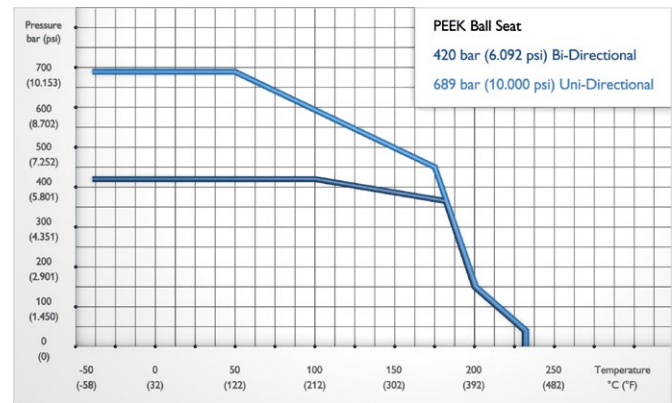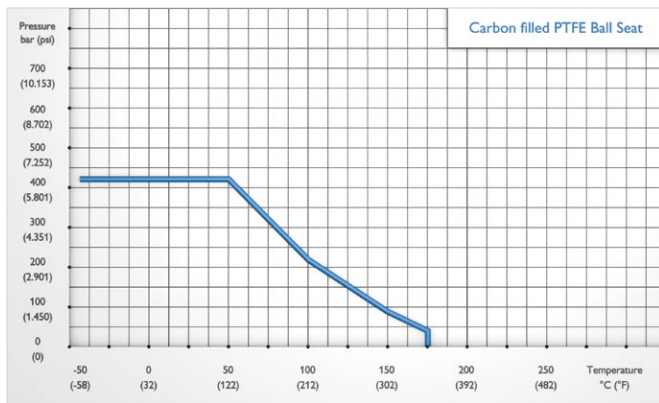

Components	Carbon Steel	Stainless Steel	Exotic Alloys						
	Material / Material No.								
Body	LF2	316 / 316L	Alloy 400	Alloy C-276	Duplex	UNS S32750	Alloy 625	6Mo	
Body End Connector									
Ball	316 / 316L	316 / 316L	Alloy 400	Alloy C-276	Duplex	UNS S32750	Alloy 625	6Mo	
Stem									
Ball Seat	Reinforced PTFE or PEEK								
Body Seals	PTFE or Graphite								
Stem Seals	PTFE or Graphite								
Gland	316								
Hex Nut	316								
Handle	316								
Handle Grip	Vinyl								
Stop Pin	A4								

Wetted components listed in **bold**.


KA Series I Options and Dimensions

Ball Valve Options

Lockable Handle


Valves can be locked in either the open or closed position with a padlock (**Option Code W**).

Padlock to be ordered separately (**Option Code U**).

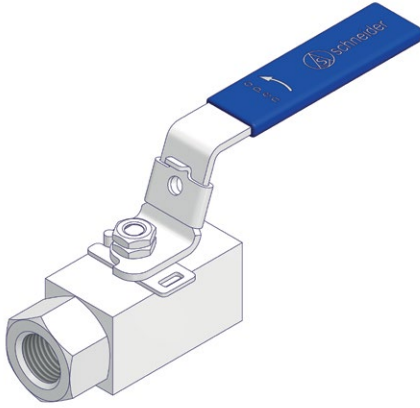


Oval Handle

Oval Handle – Optional to standard lever type (**Option Code Q**).




Extended Body

Extended Body – Extended by approx. 60 mm (2.4") (**Option Code E**).

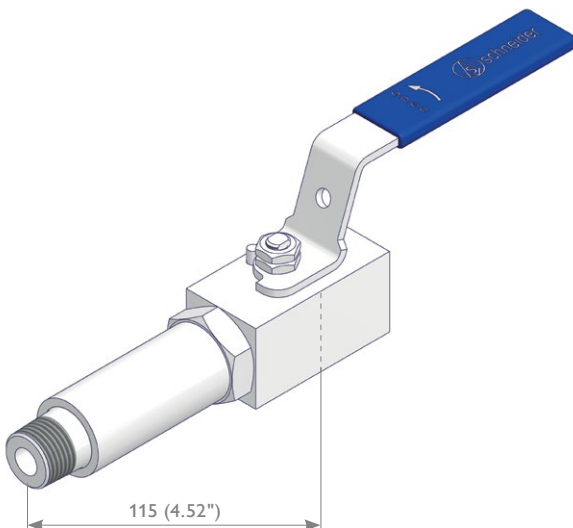


Ball Valve Dimensions


Female x Female

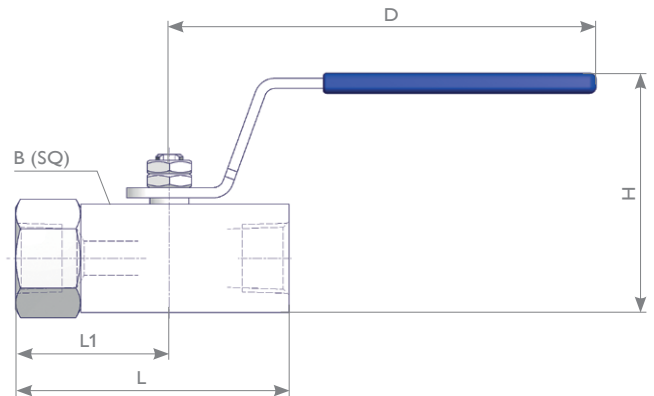

Male x Female

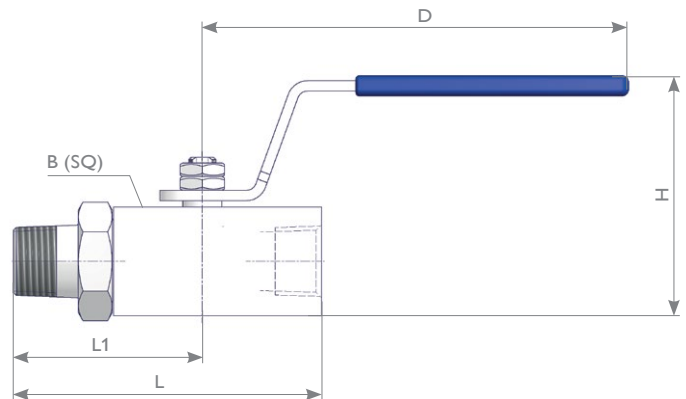

Twin Ferrule Compression Fitting

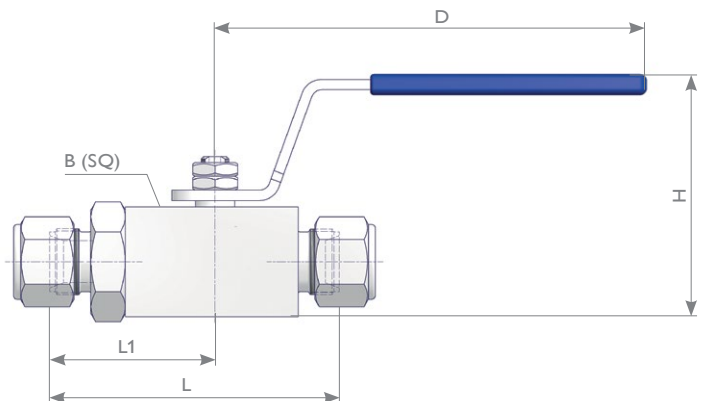

KA Series I Dimensions and Ordering Information

Ball Valve Dimensions

Style	Size	Max. Working Pressure	Standard Part Number	Bore Size	Dimensions mm (inches)				
					L	B	D	H	L1
Female x Female	1/2	6,092	KA1-LN4LN4-S	10 mm (0.39")	80 (3.15")	31.5 (1.25")	130 (5.1")	70 (2.76")	45 (1.77")
	1/2	10,000	KA3-LN4LN4-SH		80 (3.15")	38.0 (1.50")	130 (5.1")	76 (3.00")	45 (1.77")
Male x Female	1/2	6,092	KA1-JN4LN4-S		90 (3.54")	31.5 (1.25")	130 (5.1")	70 (2.76")	55 (2.17")
	1/2	10,000	KA3-JN4LN4-SH		90 (3.54")	38.0 (1.50")	130 (5.1")	76 (3.00")	55 (2.17")
Twin Ferrule Compression Fitting (Tube O.D.)	10 mm	6,092	KA1-HA3HA3-S		84 (3.31")	31.5 (1.25")	130 (5.1")	70 (2.76")	48 (1.89")
	12 mm	6,092	KA1-HA4HA4-S		84 (3.31")	31.5 (1.25")	130 (5.1")	70 (2.76")	48 (1.89")
	3/8"	6,092	KA1-HA8HA8-S		84 (3.31")	31.5 (1.25")	130 (5.1")	70 (2.76")	48 (1.89")
	1/2"	6,092	KA1-HA9HA9-S		84 (3.31")	31.5 (1.25")	130 (5.1")	70 (2.76")	48 (1.89")

Ordering Information

				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		
				K	A	1	-	L	N	4	L	N	4	-	S	E	W				
KA Ball Valve																					
Seal Material																					
	Packing	Ball Seat	End Connector Seal Ring																		
1	PTFE	Carbon filled PTFE	PTFE																		
2	Graphite	Carbon filled PTFE	Graphite																		
3	PTFE	PEEK	PTFE																		
4	Graphite	PEEK	Graphite																		
Inlet																					
	Thread Type	Fitting Type																			
LN	NPT Female	HA A-Lok	TA 1/2 NPT A-Lok Connector																		
JN	NPT Male	HS Swagelok	TS 1/2 NPT Swagelok Connector																		
JG	BSP Parallel (G) Male – EN837-1																				
	Thread Size	Fitting Size																			
2	1/4 – NPT only	3 10 mm	8 3/8"																		
4	1/2	4 12 mm	9 1/2"																		
Outlet																					
	Thread Type	Fitting Type																			
LN	NPT Female	HA A-Lok	TA 1/2 NPT A-Lok Connector																		
JN	NPT Male	HS Swagelok	TS 1/2 NPT Swagelok Connector																		
JG	Adjusting Nut BSP Parallel (G) Female – EN837-1																				
	Thread Size	Fitting Size																			
2	1/4 – NPT only	3 10 mm	8 3/8"																		
4	1/2	4 12 mm	9 1/2"																		
Material Body																					
S	1.4401 / 1.4404 / 316 / 316L	M	Alloy 400 UNS N04400																		
F	Duplex UNS S31803	H	Alloy C-276 UNS N10276																		
Options – Specify in alphabetical order																					
B	Cleaned for Oxygen Service	F	Fire Safe	P	Pressure Test acc. to API 598																
E	Extended Body	M	Wetted Parts with 3.1 certificate	H	689 bar (10,000 psi)																
Operation Options																					
Q	Oval Handle	W	Lockable Handle	U	Padlock for Lockable Handle																

Wetted Parts according to above mentioned material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue).
 Note: Not every configuration which can be created in the ordering information is feasible / available.


K Series I General Features

K Series Ball Valves

AS-Schneider's K Series Ball Valves are very robust, forged ball valves which are designed especially for severe service for the chemical and petrochemical process industry. They are especially used for close coupled hook-ups. End connector and valve body are full penetration welded for environmental protection.

Features

- Floating Ball Design
- 2 Piece Design – Fully Welded
- Forged Body in 1.0460 / A105 and 316
- Ball Bore Size 10 mm (0.39")
- Ball Seats are fully encapsulated
 - Material: PTFE or Carbon filled PTFE
- Spring Loaded Ball Seat
- Stem Seal: PTFE or Graphite
- Max. Working Pressure 250 bar (3,626 psi) | Class 1,500
- Anti-blowout Stem Design
- Low Operation Torque
- Fire Safe tested acc. to ISO 10497 / API 607 – With Graphite Seals only
- Wide Range of Connections available
- Pressure Test acc. to EN 12266 and MSS SP61
 - Leakage Rate A acc. to EN 12266-1
- Seat Leakage Class VI acc. to ANSI/FCI 70-2
- Materials comply to NACE MR 0175 / MR0103 / ISO 15156
- Ergonomic Oval Handles – Can be locked in opened and closed position

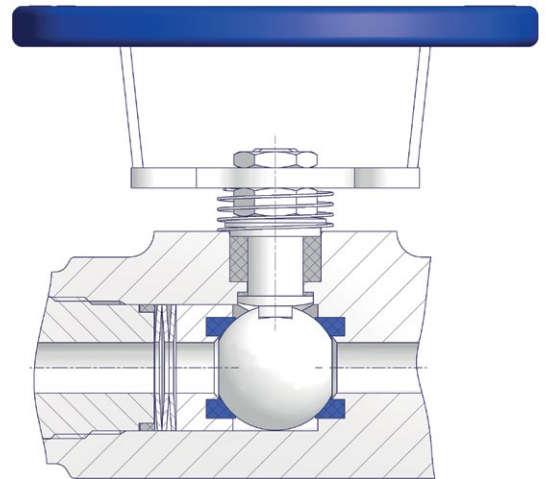

Optional Features

- Fugitive Emission Bonnet – TA-Luft conformity optional
- Anti-Static Design
- Vented Ball
- Ball Seat: PEEK, PCTFE and PFA
- Stellited Ball
- Padlock for Lockable Handle
- Extended Stem
- Cryogenic Applications
- Special Cleaning for Chlorine and Oxygen Service
- Optional Materials:
 - ASTM A350-LF2, Alloy 400, Alloy C-276, Duplex, etc.

For further details, please contact the factory.

Components	Carbon Steel	Stainless Steel
	Material / Material No.	
Body	1.0460 / A105	316 / 316L
Body End Connector		
Ball	316 / 316L	
Stem		
Seat Housing	316 / 316L	
Disc Spring	Inconel 718	
Primary Stem Seal	Reinforced PTFE	
Ball Seat	PTFE or Reinforced PTFE	
Packing	PTFE or Graphite	
Body Seals		
Gland	316	
Hex Nut	300 Series	
Locking Plate		
Oval Handle		
Handle Grip	Vinyl	
Stop Screw	A2	

Wetted components listed in bold.


K Series I Standard Ball Valve Design

Standard Ball Valve Design

Single-Ported Ball Valve with following connections:

Inlet: Flanged, Threaded or Welded



Outlet: Threaded or Flanged

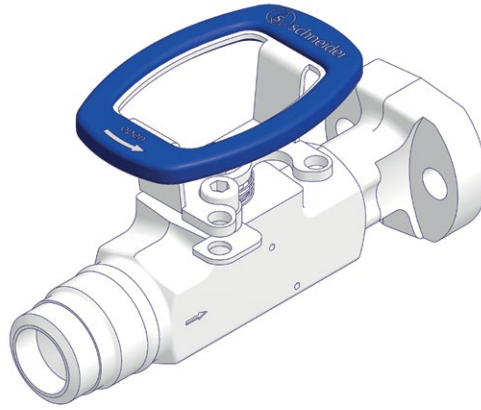



Multi-Ported Ball Valve with following connections:

Inlet: Flanged, Threaded or Welded

Outlet – Multiport Type: Threaded or Flanged & Threaded

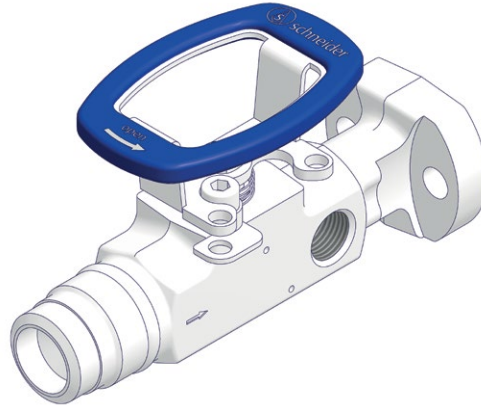

Pressure-Temperature Ratings

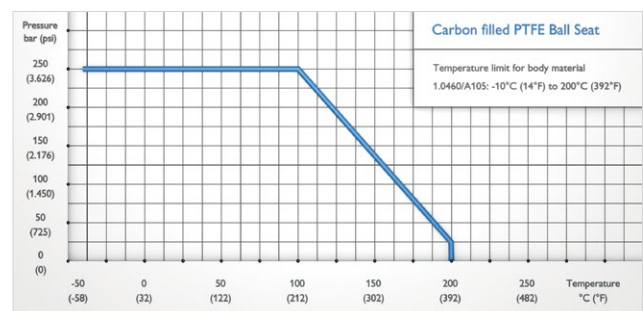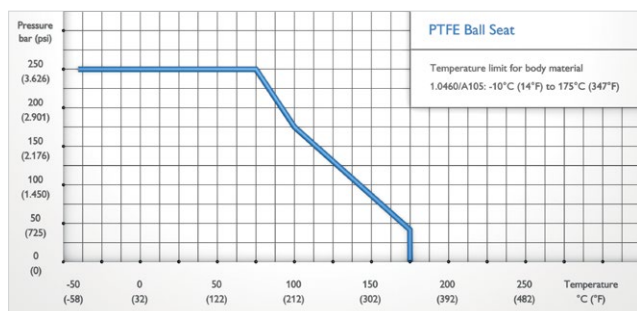

KM Series I Metal Seated Ball Valves

KM Series I Metal Seated Ball Valves

Extreme operating conditions with temperatures up to 450°C (842°F) and pressures up to 420 bar (6,092 psi) require special sealing technology in ball valves.


Standard soft seated ball valves simply aren't ready for this kind of requirements. Their plastic seals would fail. Metal seated ball valves don't have this problem. However, most metal seated ball valves are not available for high pressures and also not available for smooth operation. AS-Schneider entered the Metal Seated Ball Valve arena with the KM Series.

When developing the KM Series AS-Schneider uses the latest surface and material knowledge combined with comprehensive engineering know-how. The result is a ball valve with zero leakage even under extreme operating conditions with respect to working pressure and temperature – even though a smooth operation is provided.


Features

- 2 Piece Design – Fully Welded
- Ball Bore Size 10 mm (0.39")
- Seat and Ball Surfaces coated with Hardalloy and Carbide compounds
- 'Dissolution' Ball Valve Design and novel axial bearing washer at the stem – For smooth operation (even at high working pressures)
- Double Sealing System in fugitive emission bonnet consisting of premium-quality graphite sealing rings
- Max. Working Pressure: 420 bar | Class 2,500 | 6,092 psi
- Working Temperature: -29°C (-20°F) to 450°C (842°F)
- Anti-blowout Stem Design
- Can be locked in opened and closed position
- Oval Handle can be dismantled during operation
- Even Non-wetted Parts are made of 316 Stainless Steel for operation in corrosive environments
- Seat Leakage: ANSI / FCI 70-2 Class V
- Body Material: 1.4401 / 316 or 1.0460 / A105
- Materials comply to NACE MR 0175 / MR0103 / ISO 15156
- Ball Valve meets requirements of TA-Luft (leak rate $4,6 \times 10^{-6}$ mbar x l/s)
- Fire Safe tested acc. to ISO 10497 and API 607
- Design Basis: ISO 17292, ASME B16.34, MESC SPE 77/170, MESC SPE 77/110

For more details see our Catalogue
'AS-1902 I KM Series – Metal Seated Ball Valve'.

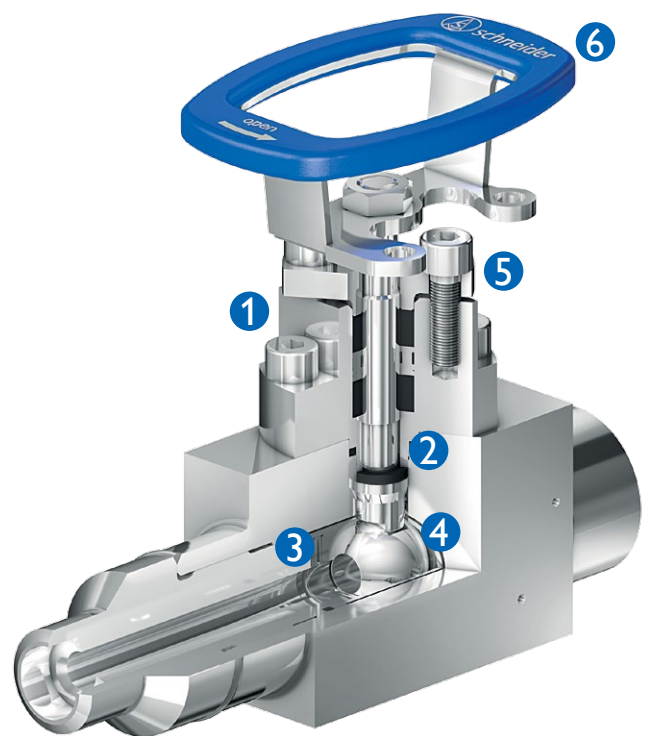

Pressure-Temperature Rating




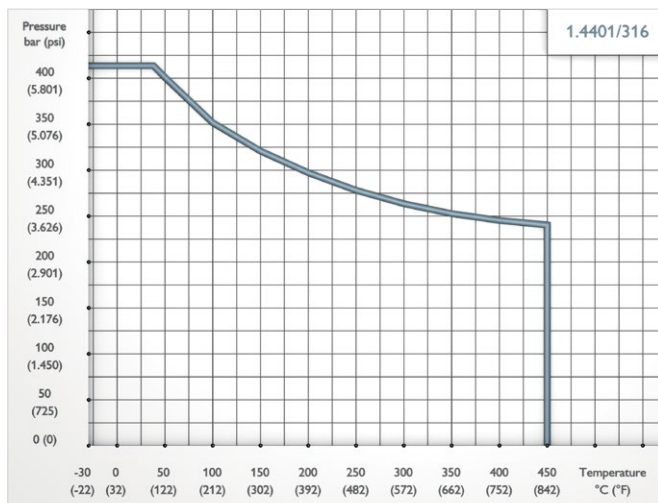


1. FUGITIVE EMISSION BONNET WITH DOUBLE SEALING SYSTEM AND LANTERN RING
2. NOVEL AXIAL BEARING WASHER INTEGRATED AT THE STEM
3. SMOOTH OPERATION DUE TO 'DISSOLUTION' BALL VALVE DESIGN
4. SEAT AND BALL SURFACES COATED WITH HARDALLOY AND CARBIDE COMPOUNDS
5. ADJUSTMENT CAPABILITY FOR PACKING WITH GLAND FOLLOWER
6. OVAL HANDLE CAN BE DISMANTLED DURING OPERATION


Low Pressure Ball Valves 1,000 psi (69 bar)

Features

- Floating Ball Design
- One Piece Design
- Reduced Bore
- Ball Valve Seat – PTFE
- Body and Stem: 316 Stainless Steel
- Stem Seal: PTFE
- Max. Working Pressure 69 bar (1,000 psi)
- Anti-blowout Stem Design
- Connections: Female NPT Threaded
- Test Standard: API 598
- Steam Rating: 125 psi (8.6 bar) WSP
- NACE MR0175 Full Compliance
- 2 Handles are available:
 - Lockable Handle
 - Butterfly Handle

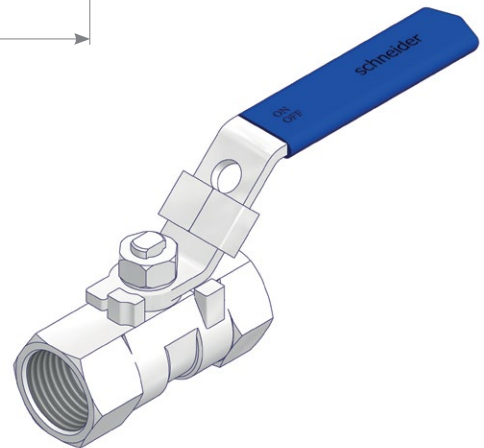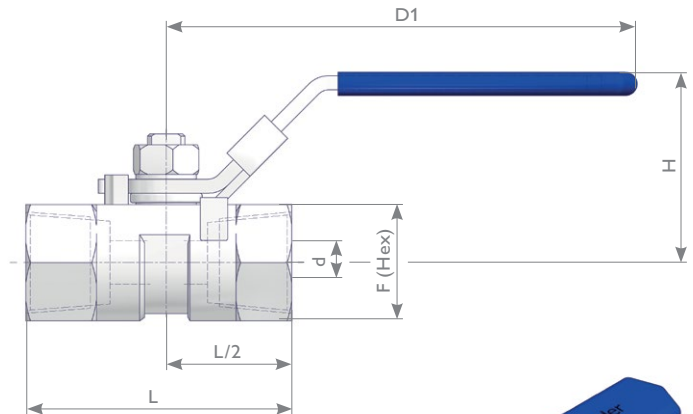

Pressure-Temperature Rating

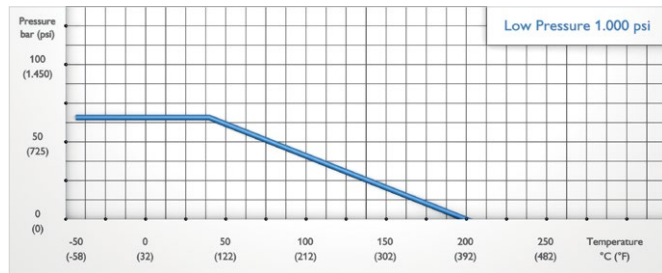

Materials of Construction

Components	Material	Components	Material
Body	ASTM A351 Gr. CF8M	Packing	PTFE
Cap	ASTM A351 Gr. CF8M	Washer	304
Ball	ASTM A351 Gr. CF8M	Spring Washer	304
Stem	316	Hexagon Nut	304
Ball Seat	PTFE	Handle	304
Thrust Washer	PTFE	Handle Grip	Vinyl
		Locking Plate	304

Ball Valve Dimensions

Size D	Handle Type	d		D1		W		F (Hex)		L		H		Part Number
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	
1/4 NPT	Lockable Handle	5.0	0.20	66.0	2.60			17.0	0.67	39.0	1.54	31.0	1.22	520519
	Butterfly Handle											51.0	2.00	30.0
3/8 NPT	Lockable Handle	7.0	0.28	76.0	3.00			21.0	0.83	44.0	1.73	35.0	1.38	521561
1/2 NPT	Lockable Handle	9.2	0.36	96.0	3.78			25.0	0.98	56.0	2.20	43.0	1.69	520594
	Butterfly Handle											56.5	2.22	34.0
3/4 NPT	Lockable Handle	12.5	0.49	96.0	3.78			32.0	1.26	59.0	2.32	46.0	1.81	522008
1 NPT		16.0	0.63	110.0	4.33			38.0	1.50	71.0	2.80	50.0	1.97	522135



schneider

Tailored to Your Business



Armaturenfabrik Franz Schneider GmbH + Co. KG

Bahnhofplatz 12 | 74226 Nordheim
Deutschland / Germany

Tel: +49 71 33 101-0

Fax: +49 71 33 101-148



www.as-schneider.com



AS-Schneider Asia-Pacific Pte. Ltd.

970 Toa Payoh North, #02-12/14/15
Singapore 318992

Tel: +65 62 51 39 00

Fax: +65 62 51 39 90



www.as-schneider.sg



Armaturenfabrik Franz Schneider SRL

Sales Office:
Str. Basarabilor, Nr. 7 | 100036 Ploiesti
Romania

Tel: +40 244 384 963

Fax: +40 244 384 963

Production Plant:
Str. Mihai Viteazu, Nr. 327i | 507085 Harman
Jud. Braşov | Romania

Tel: +40 368 41 40 25

Fax: +40 368 41 40 26



www.as-schneider.ro



AS-Schneider Middle East FZE

P.O. Box 18749 | Dubai
United Arab Emirates

Tel: +971 4 880 85 75

Fax: +971 4 880 85 76



www.as-schneider.ae



AS-Schneider America, Inc.

17471 Village Green Dr | Houston, TX 77040
United States of America

Tel: +1 281 2 58 42 63

Fax: +1 281 5 06 79 35



www.as-schneider.com