

# Temperature switch for high temperature ranges

## Ex protection EEx-d, IP 65

### Model TAG



WIKA data sheet TV 31.61



#### Applications

- Temperature monitoring and direct switching of electrical loads
- Control and regulation of industrial processes
- Universally suitable for machine building, plant, vessel, apparatus construction and food industry, chemical industry, petrochemical industry
- Ignition protection type GAS Ex-d Dust Ex-tD Gr. II Cat. 2 GD

#### Special features

- Case aluminium, epoxy resin coated
- Ingress protection IP 65, NEMA 4
- Ambient temperature -40 ... +85 °C
- 1 or 2 independent switch points, high contact rating up to 15 A / AC 220 V
- Capillary up to 10 m



Temperature switch model TAG

#### Description

These high-quality and robust temperature switches have been developed especially for safety-critical applications. High quality and product manufacturing ensures reliable monitoring of your plant. The manufacturer Cella is certified to ISO 9001. In production, the switches are traced by quality assurance software at every step and subsequently are 100 % tested.

All wetted parts materials are from stainless steel. Each switch family is available in a choice of IP 65, Ex-ia or Ex-d.

In order to ensure as flexible operation as possible, the temperature switches are equipped with micro switches, which make it possible to switch an electrical load of up to 15 A / AC 220 V directly. For smaller contact ratings, such as for PLC applications, Argon gas-filled micro switches with gold-plated contacts can be selected as an option.

With its flexible AISI 316 spiral protection hose, the model TAG temperature switch is extremely robust and guarantees optimal operating characteristics for applications requiring particularly high corrosion protection.

## Standard version

### Case

Aluminium, epoxy resin coated,  
case cover with screw-type cover,  
due to anti-twist device secured against unauthorised  
intervention

### Ingress protection

IP 65 per EN 60529 / IEC 529

### Permissible ambient temperature

-40 ... +85 °C

### Connection to thermowell

Stainless steel, connection thread ½ NPT

### Stem

AISI 316

Diameter: 12 mm

Length: 85 mm

### Measuring system

Gas actuated temperature system (SAMA class III B)

### Capillary length

Length	Code
2 m	K2m
4 m	K4m <sup>1)</sup>
6 m	K6m <sup>1)</sup>
8 m	K8m <sup>1)</sup>
10 m	K10m <sup>1)</sup>

1) The maximum permissible height difference between sensor and housing is 2 m.

### Immersion depth

The maximum immersion depth Y (see dimensional drawing)  
can be calculated as per the following equation:

Capillary length in metre x 145 mm

Example:

Capillary length 2 m

=> 2 x 145 mm = 290 mm = max. immersion depth

The length K is reduced accordingly.

### Switch contacts

1 or 2 SPDT (change-over) micro switches selectable, DPDT  
function through two SPDT micro switches with simultaneous

Switch	Code	triggering within 0.2 % of full temperature range, in the following variants:
1 x SPDT	U	
2 x SPDT	D	

Code	Design	Electrical rating (resistive load) <sup>2)</sup>	
		AC	DC
<b>Fixed switch hysteresis</b>			
1	<b>Silver contacts</b>	<u>15 A, 220 V</u>	<u>2 A, 24 V</u> 0.5 A, 125 V 0.25 A, 220 V
2	<b>Gold-plated contacts</b>	<u>1 A, 125 V</u>	<u>0.5 A, 24 V</u>
3	<b>Silver contacts</b> inert gas filled T <sub>amb</sub> : -30 ... +70 °C	<u>15 A, 220 V</u>	<u>2 A, 24 V</u> 0.5 A, 220 V
4	<b>Gold-plated contacts</b> inert gas filled T <sub>amb</sub> : -30 ... +70 °C	<u>1 A, 125 V</u>	<u>0.5 A, 24 V</u>
<b>Adjustable switch hysteresis</b>			
5	<b>Silver contacts <sup>3)</sup></b>	<u>20 A, 220 V</u>	<u>2 A, 24 V</u> 0.5 A, 220 V

2) Only the underlined data are shown on the product label

3) Max. 1 switch contact

### Repeatability

≤ 0.5 % of the full temperature range

### Setting ranges, max. test temperature, max. switch hysteresis

Setting range	Max. test temperature	Max. switch hysteresis		
		1 contact	2 contacts	1 contact, adjustable hysteresis)
-30 ... +70 °C	+120 °C	4.5 °C	4.5 °C	15 ... 35 °C
0 ... +100 °C	+120 °C	4.5 °C	4.5 °C	15 ... 35 °C
0 ... +160 °C	+190 °C	5 °C	5 °C	18 ... 35 °C
0 ... +250 °C	+300 °C	6 °C	6 °C	21 ... 45 °C
0 ... +400 °C	+500 °C	10 °C	10 °C	33 ... 77 °C
0 ... +600 °C <sup>4)</sup>	+600 °C	17 °C	17 °C	50 ... 115 °C

4) Stem dimensions: X = 102, Y = 163

## Switch points

After unscrewing the case cover, switch point adjustment can be made using the adjustment screw. The switch point is settable within the entire measuring range with the following general rule:

- Define the value  $A = 2 \times \text{repeatability} + \text{switch hysteresis}$
- If the temperature is rising, the switch point should be set between (min. + value A) up to max. of the setting range
- If the temperature is falling, the switch point should be set between min. up to (max. - value A) of the setting range

### Example:

Setting range: 0 ... 100 °C with one switch contact

Repeatability: 0.5 % of 100 °C = 0.5 °C

Switch hysteresis = 4.5 °C (see table setting ranges)

Value  $A = 2 \times 0.5 \text{ °C} + 4.5 \text{ °C} = 5 \text{ °C}$

If the temperature is rising, the switch point should be set between 5 °C and 100 °C.

If the temperature is falling, the switch point should be set between 0 °C and 95 °C ( $95 \text{ °C} = 100 \text{ °C} - 5 \text{ °C}$ ).

For optimal performance we suggest the switch point lies between 25 % and 75 % of the setting range.

## Electrical connection

½ NPT female, cable connection using internal terminal block, protective conductor connection using internal and external screw, max. earth cable cross-section 4 mm<sup>2</sup>

## Temperature switch certified per:

Low voltage directive 73/23 EEC and 93/68 EEC

## Dielectric strength

Safety class I (EN 61298-2: 1997-06)

## Mounting

Direct or wall mounting

The preferred connection location of the temperature switch should be below. Alternatively the instrument can be installed so that internal access is from the front of the enclosure and the electrical connection is located on the side.

## Weight

approx. 2.4 kg (with 2 m capillary)

## Options

- Other connection to thermowell, also with adapter
- Electrical connection ¾ NPT, G ½ or M20 x 1.5 (female)
- Cable gland on request
- Switch point adjustment to customer specification
- 2" pipe-mounting kit (with clamping element)
- Stem diameter 9.5 mm (Y = 195 mm, X = 135 mm)
- Helical bulb (ambient temperature: -30 ... +70 °C)
- Version for offshore <sup>5)</sup> or tropicalised application <sup>5)</sup>
- Version for applications to NACE <sup>5)</sup>
- Version for ammonia applications <sup>5)</sup>
- Accessories:  
Thermowells


## Approvals and certificates

- SIL-2 version <sup>5)</sup> <sup>6)</sup>
- GOST-R certificate
- Test certificate \*CA\* (confirmation of the switching accuracy)
- Test report \*CP\* (3-time listing of the switch point, requires switch point specification)
- Material certificate 3.1 per EN 10204

<sup>5)</sup> Inert gas filled contacts required

<sup>6)</sup> SIL-2 version only in conjunction with one (1) switch contact

## Dimensions in mm

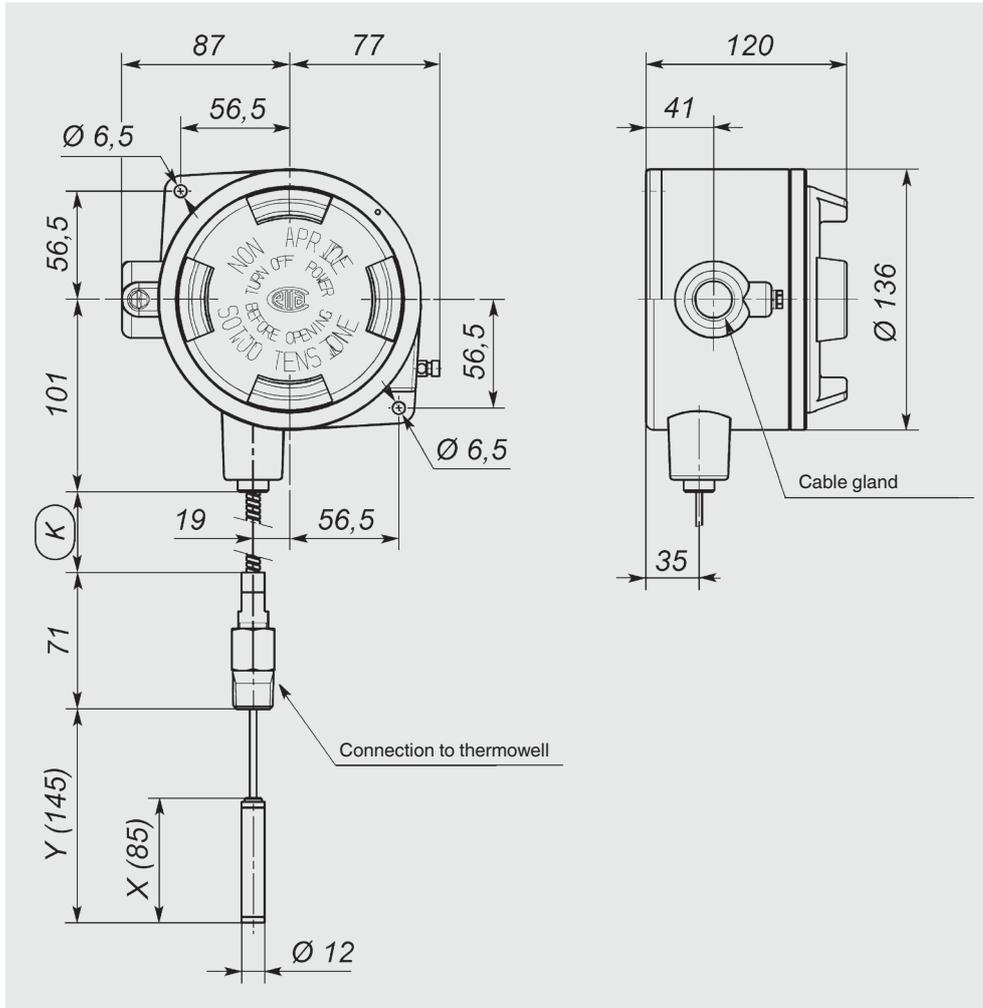

### Ordering information

Model / Switch contacts with version / Capillary length / Setting range / Connection to thermowell / Electrical connection / Switch point(s) / Switch direction(s) / Options

Example: TAG - U1 - K2m - 0/100 °C - 1/2" NPT-M - 1/2" NPT-F

© 2011 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.



**WIKA Alexander Wiegand SE & Co. KG**  
Alexander-Wiegand-Straße 30  
63911 Klingenberg/Germany  
Tel. (+49) 9372/132-0  
Fax (+49) 9372/132-406  
E-mail info@wika.de  
www.wika.de